
# User Guide

**//Z**\_ electric

#### 2. Dimmer wiring diagram


Ceiling Pull Cord LED Dimmer switch Item NO.: D029

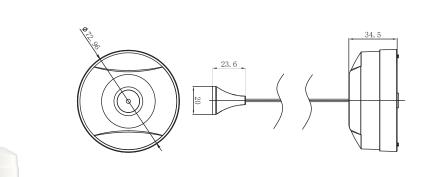

- ① Light off memory
- ② Over current protection
- ③ Over-temperaure protection

### 1. Technical Data

Model No.		D029
Description		Ceiling Pull Cord LED Dimmer switch
Input Voltage		220-240V
Input frequency		50Hz
Load	LED	5-100W
	Incandescent	5-150W
	Halogen	5-150W
Dimming mode		Trailing edge
Control Way		One way
Material	Heatsink	Aluminum
	Bottom Case	PC
Color		White
Weight(g)		76.9
Dimension(mm)		Φ72.96*34.5mm



## 3. Operation and function

- 1. Power on/off: Pull the rope vertically to turn on/off the light
- 2. Minimum brightness adjustment: Use the fine-tuning knob to adjust the brightness clockwise and counterclockwise.
- 3. Dimming function: vertically pull the rope to adjust the brightness of the light

## 4. WARNING

- a. Installation must be carried by a qualified electrician.
- b. Before installation, please check whether it conforms to local electric standards
- c. Power supply must be turn off when install and clean the dimmer.
- Wipe the surface dust or dirt with soft cloth or tissue, do not use the detergent or other corrosive chemical solution.
- d. Please place and protect the cover properly when it's in installation to avoid the damage.
- e. There is no strong impact, vibration, electromagnetic field interference, corrosion, or dusty gas around the usage environment
- f. The product should avoid frost, condensation, water seepage, rain, etc.